

FEATURES

- 0-10V Dimming optional
- High Luminous efficacy - Up to 140 Lumens per watt
- Compact and robust structure, excellent reliability
- Various installation applications
- Die-cast aluminum housing, great corrosion resistance and cooling performance

COMPLIANCE

ETL Listed UL-844

Hazardous Classifications:

- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups F, G
- Class III

Marine Classifications:

- UL 1598, UL 1598A
- ABS



ELECTRICAL SPECIFICATIONS

- Power: 400W, 300W, 250W, 200W, 150W, 100W, 80W, and 60W
- Efficiency: 140lm/W
- Input Voltage: 100 - 277 or 277-480 VAC
- Input Frequency: 50/60Hz
- CCT: 5000K
- CRI: >70
- Beam Angle: 120°
- Dimming: 0-10V dimming optional

MECHANICAL SPECIFICATIONS


- Housing Material: Die-cast Aluminum
- Lens: Tempered glass
- Hardware: stainless steel
- Fixture Color: Gray RAL7040 (Standard)
- Mounting: Ceiling, Wall, Hook, Trunion, Pole and Stanchion
- Cable Entries: Top - 3/4" NPT (standard)

STOCKED SKUS


Power	Lumens	Voltage	Part Number	UPC	Order Code
60W	8,400	100-277 VAC	EX-60WAD50D12027M70J01	817938020945	C1D2-EXDS60
80W	11,200	100-277 VAC	EX-80WAD50D12027M70J01	817938020952	C1D2-EXDS80
100W	14,000	100-277 VAC	EX-100WAD50D12027M70J01	817938020969	C1D2-EXDS100
150W	21,000	100-277 VAC	EX-150WA3D50D12027M70J01	817938020921	C1D2-EXDS150
150W	21,000	277-480 VAC	EX-150WA3D50D12048M70J01	817938020938	C1D2-EXDS150-4V
200W	28,000	100-277 VAC	EX-200WA3D50D12027M70J01	817938020976	C1D2-EXDS200
250W	35,000	100-277 VAC	EX-250WA4D50D12027M70J01	817938020983	C1D2-EXDS250
300W	42,000	100-277 VAC	EX-300WA4D50D12027M70J01	817938020990	C1D2-EXDS300
400W	56,000	100-277 VAC	EX-400WA4D50D12027M70J01	817938021003	C1D2-EXDS400



DIMENSIONS

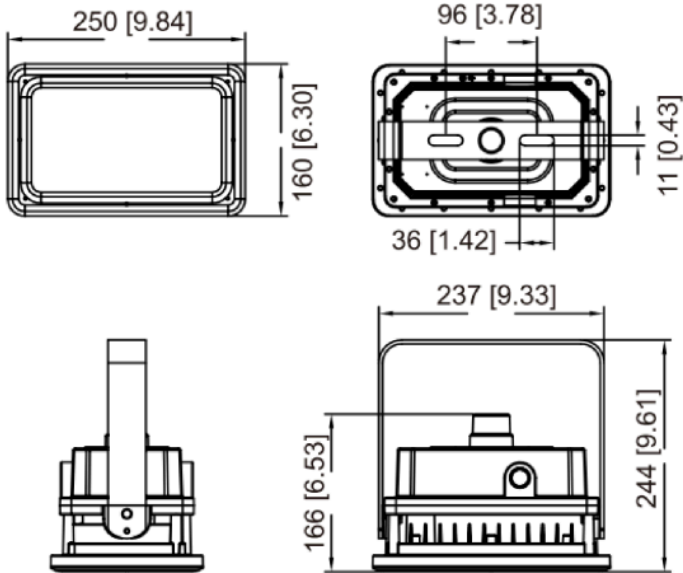


C1D2-EXDS60

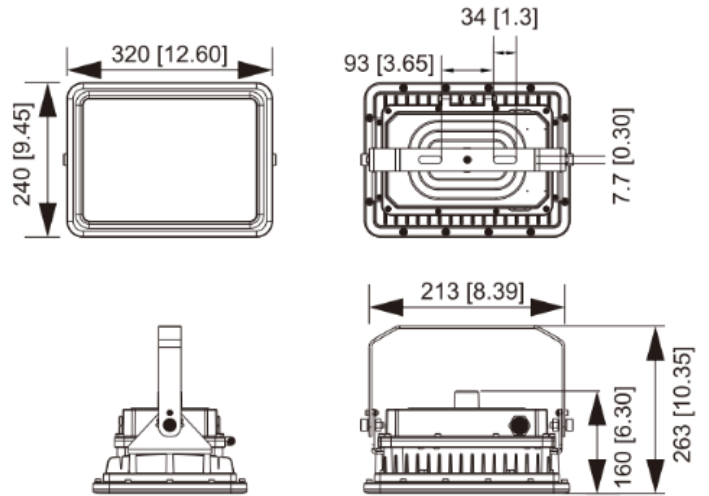


C1D2-EXDS80

C1D2-EXDS100

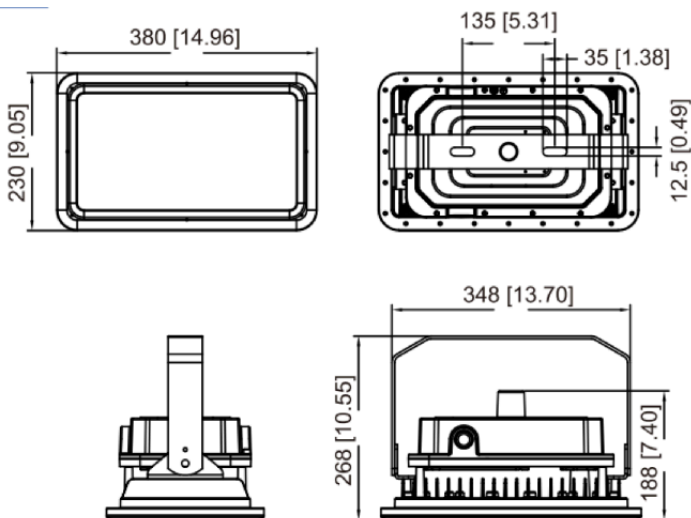

C1D2-EXDS150

C1D2-EXDS200

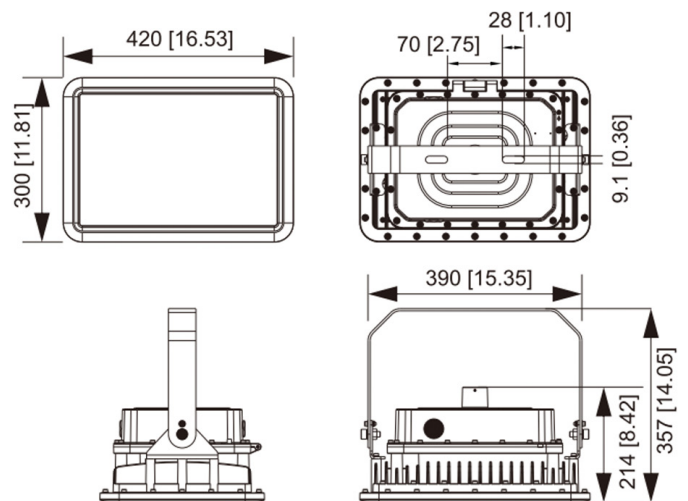


C1D2-EXDS250

C1D2-EXDS300

C1D2-EXDS400




STANDARD MOUNTING

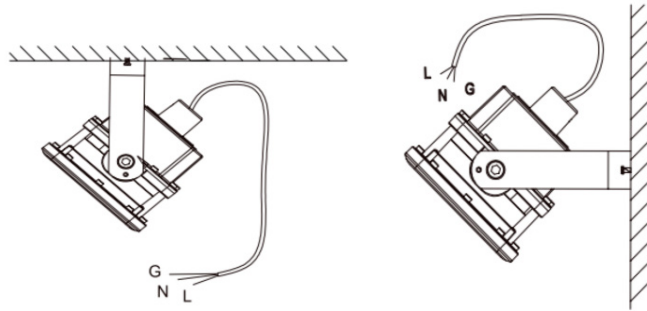


Ceiling - Yoke Mount

Wall - Yoke Mount


ADDITIONAL MOUNTING OPTIONS

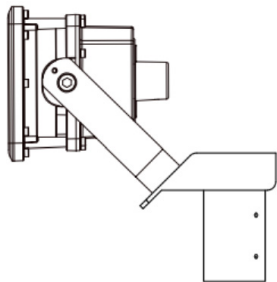


Slipfitter-Yoke Adapter (2 3/8 tenon)
EXD-SF-Y

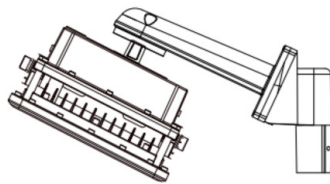


25° Pole Mount (2" pipe)
EXD-25PM

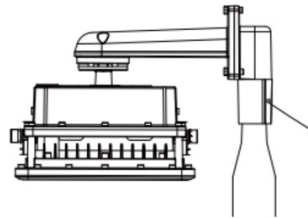


90° Pole Mount (2" pipe)
EXD-90PM

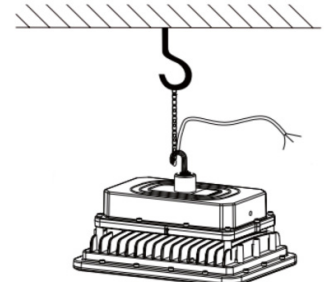


Hook Mount
EXD-H

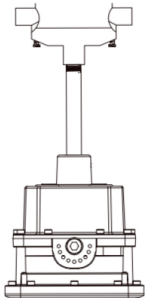


Straight Pipe
EXD-P
 3/4" NPT Junction Box
EXD-J

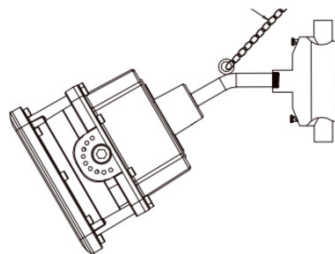

Bent Pipe w/ Chain
EXD-BP
 3/4" NPT Junction Box
EXD-J

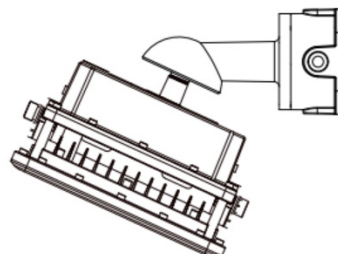


25° Wall Mount w/ Junction Box
EXD-25WM-J

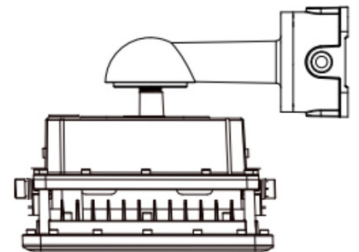


90° Wall Mount w/ Junction Box
EXD-90WM-J

3/4 NPT JUNCTION BOX



View Exdura
 Mounting options
 video



EXD-J

**VIEW LIVE INVENTORY
 AND PRICING ONLINE**

