

Durabox F G3

LED Shoebox Lights

Project _____
 Contact _____
 Application Voltage _____
 Fixture Power / Calculated Amps _____
 Quantity / Quote _____
 Notes _____

To calculate current draw: divide fixture power by application voltage.

FEATURES

- 5 Year Limited Replacement Warranty
- UL/DLC Listed
- 0-10V Dimming
- High Luminous efficacy - Up to 150 Lumens per watt
- Die-cast aluminum housing with PC lens
- Twist-lock photocells optional
- Glare shield optional
- 10KV surge protectors standard
- 480V options available



MECHANICAL SPECIFICATIONS

- **Housing Material:** Die-cast Aluminum with stainless steel hardware
- **Lens:** Polycarbonate
- **Hardware:** SMT 3030 LEDs with 10kV surge protector
- **Fixture Color:** Bronze, Black or White
- **Mounting:** Universal Pole Mount, Straight Arm Mount, Slipfitter, Trunnion, Square and Round Pole Adjustable Mount and Wall Mount.



ELECTRICAL SPECIFICATIONS

- **Power:** 310W, 240W and 150W Max options
- **Efficiency:** 150 lm/W
- **Input Voltage:** 100 - 277 or 277-480 VAC
- **CCT:** 5000K
- **CRI:** >70
- **Beam Angle:** Type 3
- **Dimming:** 0-10V dimming optional

STOCKED SKUS

Color: Part Number	Op Voltage	CCT	Power	Lumens	Weight	EPA
Bronze: DBXF150-AL-3T5K-G3 Black: B-DBXF150-AL-3T-ACT-G3 White: W-DBXF150-AL-3T-ACT-G3	100-277 VAC	5000K	150W // 120W 100W // 80W	23,250 // 18,600 15,500 // 12,400	11.0 lbs	1.28 ft2
Bronze: DBXF150-AL-3T5K4V-G3	277-480 VAC	5000K	150W // 120W 100W // 80W	23,250 // 18,600 15,500 // 12,400	11.0 lbs	1.28 ft2
Bronze: DBXF240-AL-3T5K-G3 Black: B-DBXF240-AL-3T-ACT-G3 White: W-DBXF240-AL-3T-ACT-G3	100-277 VAC	5000K	240W // 220W 200W // 170W	34,800 // 31,900 29,000 // 24,650	11.7 lbs	-
Bronze: DBXF310-AL-3T5K-G3 Black: B-DBXF310-AL-3T-ACT-G3 White: W-DBXF310-AL-3T-ACT-G3	100-277 VAC	5000K	310W // 280W 260W // 240W	47,430 // 42,840 39,780 // 36,720	14.6 lbs	1.95 ft2
Bronze: DBXF310-AL-3T5K4V-G3	277-480 VAC	5000K	310W // 280W 260W // 240W	47,430 // 42,840 39,780 // 36,720	14.6 lbs	1.95 ft2


West Durable Lighting

1580 N Interstate 35E, Carrollton, TX 75006
 orders@westdurablelighting.com
 888-998-0864


**VIEW LIVE INVENTORY
 AND PRICING ONLINE**




DIMENSIONS

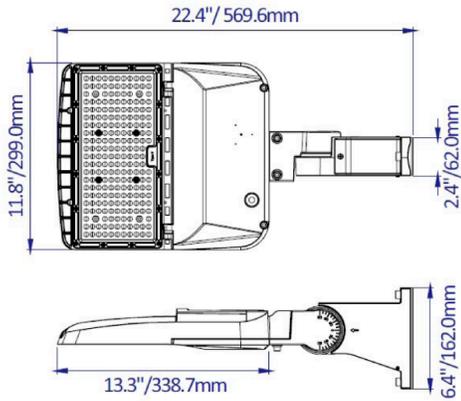

Bronze: **DBXF150-AL-3T5K-G3**
 Bronze 480V: **DBXF150-AL-3T5K4V-G3**
 Black: **B-DBXF150-AL-3T-ACT-G3**
 White: **W-DBXF150-AL-3T-ACT-G3**

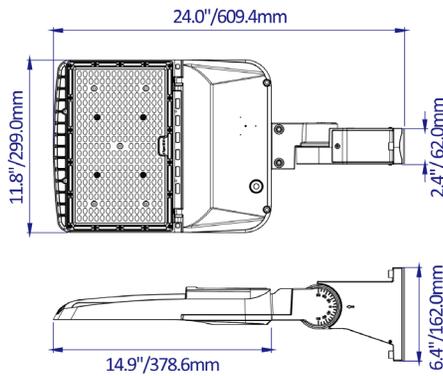

Bronze: **DBXF240-AL-3T5K-G3**
 Black: **B-DBXF240-AL-3T-ACT-G3**
 White: **W-DBXF240-AL-3T-ACT-G3**

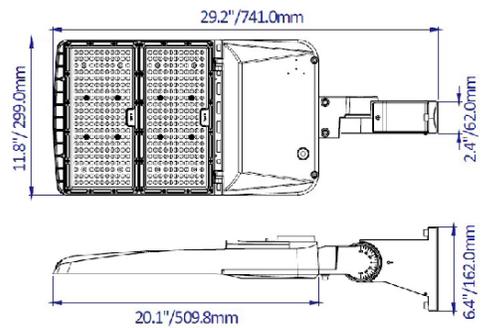

Bronze: **DBXF310-AL-3T5K-G3**
 Bronze 480V: **DBXF310-AL-3T5K4V-G3**
 Black: **B-DBXF310-AL-3T-ACT-G3**
 White: **W-DBXF310-AL-3T-ACT-G3**

MOUNTS



Universal Pole
DBXF-UM-G3
B-DBXF-UM-G3
W-DBXF-UM-G3

Arm
DBXF-A-G3
B-DBXF-A-G3
W-DBXF-A-G3

Slipfitter
DBXF-S-G3
B-DBXF-S-G3
W-DBXF-S-G3

Trunnion
DBXF-T-G3
B-DBXF-T-G3
W-DBXF-T-G3

Adjustable Square/round
DBXF-SR-G3
B-DBXF-SR-G3
W-DBXF-SR-G3

Wall Mount
DBXF-WM-G
B-DBXF-WM-G3
W-DBXF-WM-G3

ACCESSORIES



Twist Lock Photocell
 100-277 VAC: **DBXF-PC-G3**
 208-480 VAC: **DBXF-PC-G3-4V**

External Glare Shield (Bronze)
 150W: **DBXF-150GS-G3**
 310W: **DBXF-310GS-G3**

